




KGS-510F Ver.C

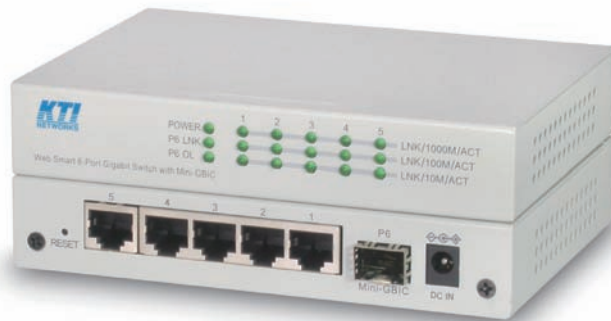

Web Smart 6-Port L2 Gigabit Ethernet Switch with 1 GbE SFP Port

Product Highlights:

- Compact design
- Web management
- One 1000M SFP fiber
- DHCP support
- 802.1Q Tagged VLAN support
- QoS WFQ support
- Port mirroring function
- 802.1x port access control
- RSTP and MSTP support
- LACP link aggregation
- Jumbo frame support
- IGMP snooping
- High power saving

Key Features:

- Provides 5 10/100/1000Mbps RJ-45 and one 1000M SFP
- Provides in-band web-based management interface
- All copper ports support auto-negotiation and auto-MDI/MDI-X detection
- Provides full wire speed performance
- Supports jumbo frame at all speeds
- Supports 802.3x flow control for full-duplex and backpressure for half-duplex
- Provides port status, statistic monitoring and control function
- Provides DHCP client & static IP configuration
- Supports port-based and 802.1Q Tag-based VLAN
- Provides QoS function
- Provides port link aggregation (trunking) function with LACP support
- Provides port mirroring function
- Provides 802.1x authentication for port access
- Supports 802.1w RSTP and 802.1s MSTP
- Provides IGMP snooping

Specifications:


Standard	IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.1w, 802.1x, 802.3ad, 802.1Q
Network Ports	5 10/100/1000Mbps Gigabit copper ports Shielded RJ-45, auto-negotiation, auto-MDI/MDI-X support 1 1000Mbps Gigabit fiber SFP port SFP supports standard SFP fiber transceiver installation
Network Cables	10/100Mbps: Cat.5 up to 100m, 1000Mbps: Cat.5e or higher up to 100m MMF 50/125 60/125, SMF 9/125
MAC Address Table	8K entries
IP Multicast Groups	8K
Buffer Memory	136K bytes
VLAN	Port based VLAN, 802.1Q Tag-based VLAN
Port Link Aggregation	LACP (802.3ad) support
QoS	4 priority queues, Classification: Port-based, 802.1p, IP DSCP
LED Indication	Per unit: Power Per copper port: 1000M, 100M, 10M speed/link/activity status SFP port: 1000M speed/link/activity status, Optical link status
Management Support	Web browser software, SNMP MIB-2
Management Objects	System settings, Port status/statistics, Port control, VLAN, QoS, LACP aggregation, port mirroring, Firmware upgrade, 802.1w RSTP, 802.1x, IGMP snooping, Storm control, Power saving, Configuration backup and restore



Optional Accessories:

WMK5	Wall mounting kit
KTI quality SFP transceivers	

Dimension



Environment	Operating Temperature: 0°C ~ 40°C (Main device)
	Storage Temperature: -20°C ~ 70°C
	Relative Humidity: 10% ~ 90% non-condensing
Dimension	144 x 104.5 x 26 mm (WxDxH)
Power Input	+5V ~ +12VDC (+/-5%) via external power adapter
Power Consumption	5W max. @+5V (DC IN) Less than 0.5W when no link ports under power saving mode
Approval	FCC Class A, CE mark Class A

Fiber Optical Specifications:

Model	Connector	Fiber	Wavelength	Tx Power*	Rx Sens.	Rx Max.	Distance
-SX	LC	62.5/125 MMF 50/125 MMF	850nm	-9.5 ~ -4dBm	-18dBm	0dBm	200m 500m
-LX	LC	MMF SMF	1310nm	-9.5 ~ -3dBm	-20dBm	-3dBm	550m 10km
-LX20	LC	SMF	1310nm	-8 ~ -2dBm	-23dBm	-1dBm	20km
-LX30	LC	SMF	1310nm	-4 ~ +1dBm	-24dBm	-3dBm	30km
-LX50	LC	SMF	1550nm	-4 ~ +1dBm	-24dBm	-3dBm	50km
-LX70	LC	SMF	1550nm	0 ~ +5dBm	-24dBm	-3dBm	70km
-W3510	Bi-Di LC	SMF	Tx 1310nm Rx 1550nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W5310	Bi-Di LC	SMF	Tx 1550nm Rx 1310nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W3520	Bi-Di LC	SMF	Tx 1310nm Rx 1550nm	-8 ~ -3dBm	-23dBm	-1dBm	20km
-W5320	Bi-Di LC	SMF	Tx 1550nm Rx 1310nm	-8 ~ -3dBm	-23dBm	-1dBm	20km
-W3410	Bi-Di LC	SMF	Tx 1310nm Rx 1490nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W4310	Bi-Di LC	SMF	Tx 1490nm Rx 1310nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W3410S	Bi-Di SC	SMF	Tx 1310nm Rx 1490nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W4310S	Bi-Di SC	SMF	Tx 1490nm Rx 1310nm	-9 ~ -3dBm	-21dBm	-1dBm	10km

*Data for 62.5/125µm MMF, 9/125µm SMF



FCC Part 15, Class A
CISPR 22 Class A

Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: <http://www.ktinet.com.tw>

KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: <http://www.ktinet.com>

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.
This information is subject to change without prior notice.

Application Example

Edge workgroup switch with uplink to 802.1Q tagged backbone network via 1000M fiber

